




TIERED REAR COIL



GEORGE BARKER

Date of First Issue May 03
DP 00003G00






TIERED REAR COIL

Refrigerated display cabinets for the preservation of:

 **DAIRY PRODUCTS**
Milk
Butter
Cheese






 **WRAPPED PRODUCTS**
Fresh Meat
Cooked Meat
Fresh Fish
Poultry

 **PROVISIONS**
Ready Meals
Pies
Pizza

 **PRODUCE**
Fruit
Vegetables
Salads

 **CONVENIENCE**
Sandwiches
Drinks
Prepared Salads
Food-to-Go

TECHNICAL DETAILS

-  SINGLE DRAIN - 38mm Diameter Outlet
-  DEFROST - Natural / Unassisted
-  ENVIRONMENTAL - Foam Insulation, ODP Zero (Ozone Depletion Potential), Low GWP (Greenhouse Warming Potential)
-  SHELF LOADING CAPACITY - 200kg/sqm (Max.)
-  SHELF ANGLES - 3 position 0° (Horizontal), 10° Down & 20° Down

CABINET TYPE	LENGTH MM	EVAPORATION TEMP	EXTRACT RATE
BV1875M	1875	-7°C	3.73
BV2500M	2500	-7°C	4.65
BV3750M	3750	-7°C	6.42
BVE1875M (end of island)	1875	-7°C	3.73
BVE2500M (end of island)	2500	-7°C	4.65
BVR1875M	1875	-7°C	2.80
BVR2500M	2500	-7°C	3.50
BVR3750M	3750	-7°C	4.82
BVRE1875M (end of island)	EOI 1875	-7°C	2.80
BVRE2500M (end of island)	EOI 2500	-7°C	3.50
BVC1875M	1875	-7°C	2.85
BVC2500M	2500	-7°C	3.80
BVC3750M	3750	-7°C	5.70
BVCE1875M (end of island)	EOI 1875	-7°C	2.85
BVCE2500M (end of island)	EOI 2500	-7°C	3.80
BVCR2500M	2500	-7°C	4.50
BVCR3750M	3750	-7°C	6.50











STANDARDS

NOTE 1. Extraction rate calculated at 25°C 60% RH. Revised figures available on request for operation in typical store conditions.

NOTE 2. Cabinets tested in accordance with EN441 Parts 1 to 12.

NOTE 3. In line with our policy of continuous product improvement, George Barker and Company reserve the right to alter features and specifications at any time without notice.

FEATURES AND BENEFITS

-  MAXIMUM DISPLAY FLEXIBILITY
-  ADJUSTABLE BASE DEPTH. WIDE OR NARROW
-  WITH OR WITHOUT CANOPY
-  MODULISED ROLL - IN BASES AVAILABLE
-  PANORAMIC TERMINAL END PANELS
-  DURABLE CONSTRUCTION
-  EASILY ACCESSIBLE FOR SERVICING PURPOSES
-  RECYCLABLE MATERIALS
-  ENERGY EFFICIENT
-  PRECISE TEMPERATURE CONTROL



G3000

3000 SERIES PLUS



Optional lift up front on roll-in case

Minimal canopy projection for increased vision of products



Greater flexibility for combined product display styles



Easily removable base decks for cleaning purposes




Easy access for electrical isolation




Removal of plinth for ease of access to the electrics tray



Pull out electrics tray for ease of accessibility

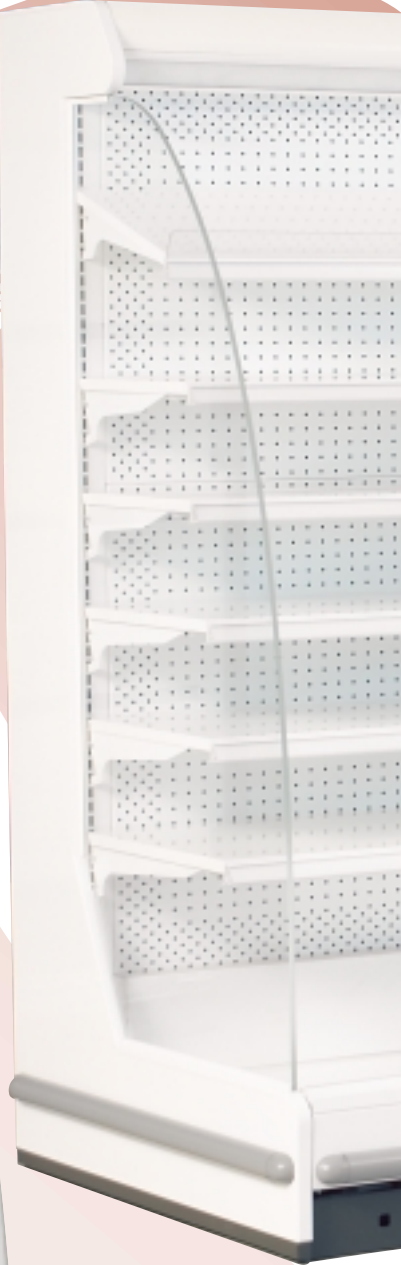

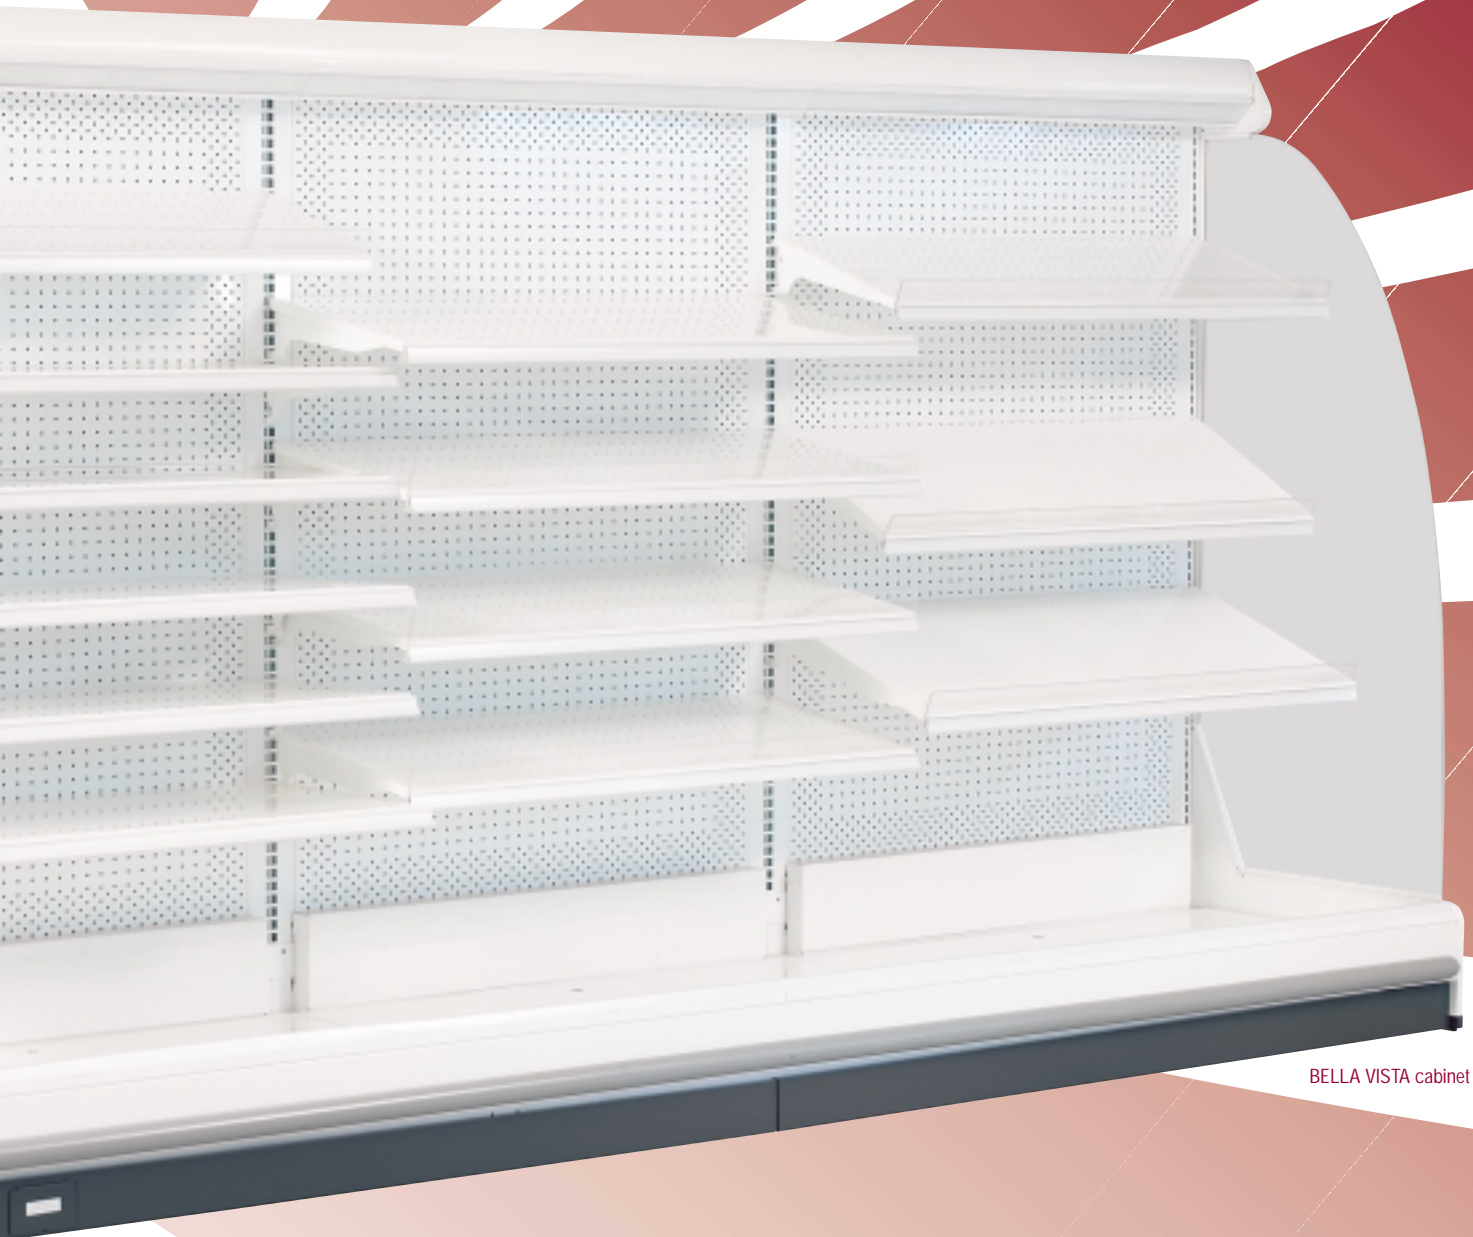

BELLA VISTA cabinet



Maximum visibility with no canopy option



Excellent display for standard 'Euro-crates'



Total flexibility for all merchandising solutions



Roll-in milk trolleys with chilled shelves above

TIERED REAR COIL

		ACCESSORIES																		
		EXPANSION VALVE		CONTROLS		TEMPERATURE DISPLAY		SHUT OFF VALVE		NIGHT BLIND		RISERS		DIVIDERS		TICKET INSERT				
		MECHANICAL	ELECTRONIC	MECHANICAL	ELECTRONIC	DIGITAL	LIQUID & SUCTION	MANUAL	MOTORISED	MIRRORS	FISH BARS	SHAMS	SHELF	BASE	50mm SHELF	75mm SHELF	100mm SHELF	100mm BASE	SHELF	BASE
	CABINET LENGTH mm																			
CANOPLYLESS TIERED WIDE/NARROW <p>PROFILE mm A = 273 P = 193 B = 1028/1228 S1 = 350 C = 400 S = 550 max D = 600/800 T = 1660 H = 2050</p>	BV1875M	1875	●			●	●	●												
	BV2500M	2500	●			●	●	●												
	BV3750M	3750	●			●	●	●												
	BVE1875M	2084	●			●	●	●												
	BVE2500M	2550	●			●	●	●												
	CANOPLYLESS TIERED REDUCED WIDE/NARROW <p>PROFILE mm A = 273 P = 193 B = 1028/1228 S1 = 350 C = 400 S = 550 max D = 600/800 T = 1210 H = 1600</p>	BVR1875M	1875	●			●	●	●											
BVR2500M		2500	●			●	●	●												
BVR3750M		3750	●			●	●	●												
BVRE1875M		2084	●			●	●	●												
BVRE2500M		2550	●			●	●	●												
CANOPIED TIERED WIDE/NARROW <p>PROFILE mm A = 273 P = 193 B = 1230/1050 S = 500 max C = 1186 T = 1647 D = 600/800 H = 2050</p>	BVC1875M	1875	●			●	●	●												
	BVC2500M	2500	●			●	●	●												
	BVC3750M	3750	●			●	●	●												
	BVCE1875M	2084	●			●	●	●												
	BVCE2500M	2550	●			●	●	●												
ROLL IN MILK <p>PROFILE mm B = 1000 C = 1186 H = 2050 M = 1356 S = 550 MAX T = 1920</p> <p>TROLLEY SUPPLIED BY OTHERS</p>	BVCR2500M	2500	●			●	●	●												
	BVCR3750M	3750	●			●	●	●												

NB: ● Standard Cabinet Specification includes:
 Mechanical expansion valve, Liquid & suction shut off valves, Danfoss EKC Electronic controls. Digital temperature display, Shelving as illustrated above & GB 3000 bumper, where applicable.